



Model: JLV-12400TK
JLV-24400TK

Size: 240x58x30mm



Brief Information

Powermax™
Technology Inside

400W

Power Supply (C.V.)

Model JLV-12400TK / JLV-24400TK

Input 200-250V AC

Output 12VDC 33.3A 400W / 24VDC 16.7A 400W

Product Features

- Narrow profile, easy for installation
- High transfer efficiency
- Endurable & stable quality
- 100% full loading, 100% burn-in tested
- Overload/short circuit protection

MAIN ELECTRICAL DATA

AC Input

Input Voltage	200-250V
Input Frequency	50/60Hz
Efficiency (Typ.)	90%
Input Current	200V: 3.2A@12V 200V: 3.2A@24V
Inrush Current	65A
Leakage Current	5mA/220VAC

DC Output

Output Voltage	12V	24V
Rated Current	33.3A	16.7A
Rated Power	400W	400W
Ripple & Noise (Max.)	<300mVp-p	<300mVp-p
Setup, Rise Time	1500ms/220VAC	1500ms/200VAC
Line Regulation	1%	1%
Load Regulation	1%	1%

Service Environment

Working Temp.	-25°C~50°C
Working Humidity	20~95%RH
Storage Temp.	-40°C~60°C
Storage Humidity	10~95%RH

Protection

Overload	Yes, cut-off mode, output shuts down if 5-30% overloaded, automatic recovery
Short Circuit	Yes, hiccup mode, recovers automatically after fault condition is removed

Safety

Safety Standard	EN 55032A CLASS A
Withstand Voltage	I/P-O/P: 4KVAC I/P-GND: 1.5KVAC O/P-GND: 0.5KVAC
Isolation Resistance	I/P-O/P: >100M Ohms / 500VDC /25°C / 70%RH

Packaging Information


Product Dimension	240x58x30 mm
Products Net Weight	460 G
PCS/Carton(QTY)	30 PCS
Master Carton Size	38*25*21 cm
G. Weight/ Carton	15 KG

Installation Tips:

- Please identify the power supply's input and output before installation.
- Ensure correct output + & - wire connection.
Power on after wire connection is done.
- To avoid voltage drop and loading capacity wasting on the output extension wire, please install the power supply to the loading as near as possible, if must use long extension wires, thicker wires and less loading wattage is required.
- The power supply to be installed at good ventilation and cooling environment.

Physical Drawing

Unit: mm

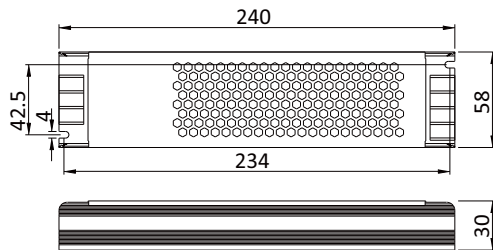

Brief Information

PowermaxTM
Technology Inside

400W

Power Supply (C.V.)

Model JLV-12400TK / JLV-24400TK

Input 200-250V AC

Output 12VDC 33.3A 400W / 24VDC 16.7A 400W


Input & Output:

9500-7P Screw Terminals With Cover
inflamming retarding


Input 3 Pins, Output 4 Pins.

Housing: Aluminium

Block Diagram

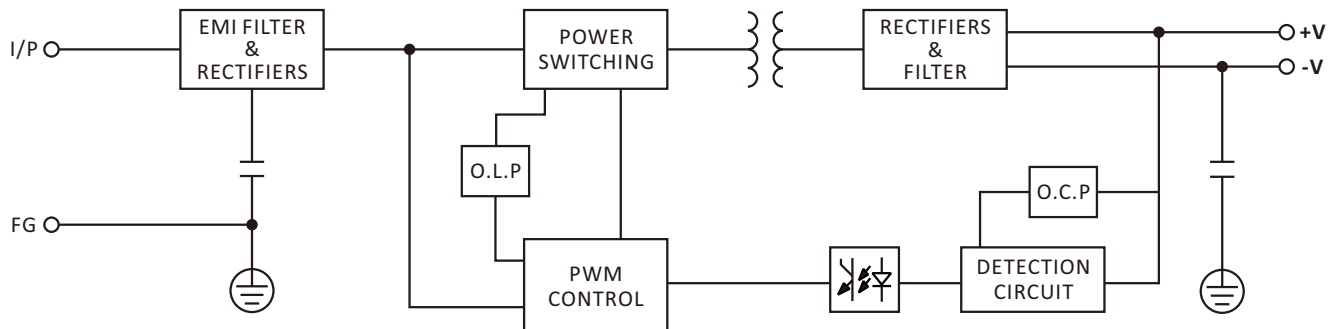

Derating Curve

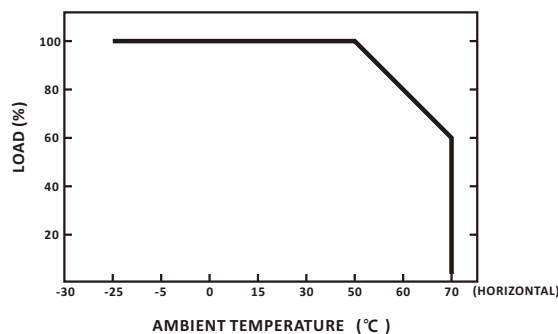

Static Characteristics

