

5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm

- super bright leds, stable and reliable.
- Double PCB, reduce the voltage drop.
- High cost-effective.
- Leds with one BIN system, consistent color, Ra80 and R90 available.
- IP grade: IP20
- cUL/CE/ROHS certification.



Application:


Widely used in hotels、shopping malls、furniture、cabinets、shelf, as decoration lighting, direct lighting or indirect lighting

Installation:

3M Adhesive

Warranty:

5years

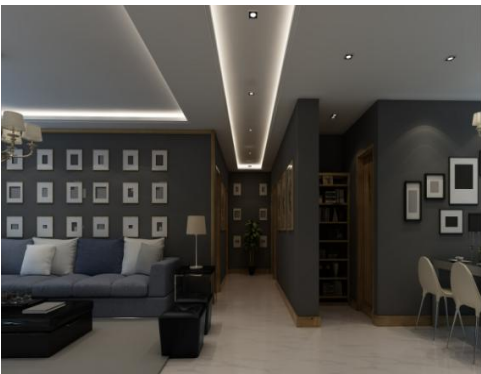

Optical&Electric:

Product Model	Color	CCT (K)	Ra	Beam Angle (°)	Lumen (lm/m)	Efficiency (lm/W)	Voltage (V DC)	Current (mA/m)	Power (W/m)
SR60-12/48-8/50-R2R	WW	2700	≥80/90	120	480/432	100/90	12/24	400/200	4.8
SR60-12/48-8/50-R2R	WW	3000	≥80/90	120	499/437	104/91	12/24	400/200	4.8
SR60-12/48-8/50-R2R	NW	4000	≥80/90	120	518/446	108/93	12/24	400/200	4.8
SR60-12/48-8/50-R2R	CW	6500	≥80/90	120	514/432	107/90	12/24	400/200	4.8

5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm


Other features:

Product Model	IP grade	Working environmen (°C)	Storage environment(°C)	Length(m)	Max connection Length (m)	LED Qty (pcs/m)	N.W (g/Roll)
SR60-12/48-8/50-R2R	IP20	-25~+45	-30~+80	5	5	60	27.5

Notes:

- Testing environment temperature: 25±2℃;
- The above data is confirmed based on the measured data of 1M samples, RA90, and IP20.
- Different IP grade with different Data.
- Mark"—"means no testing requirement.


Dimensions:

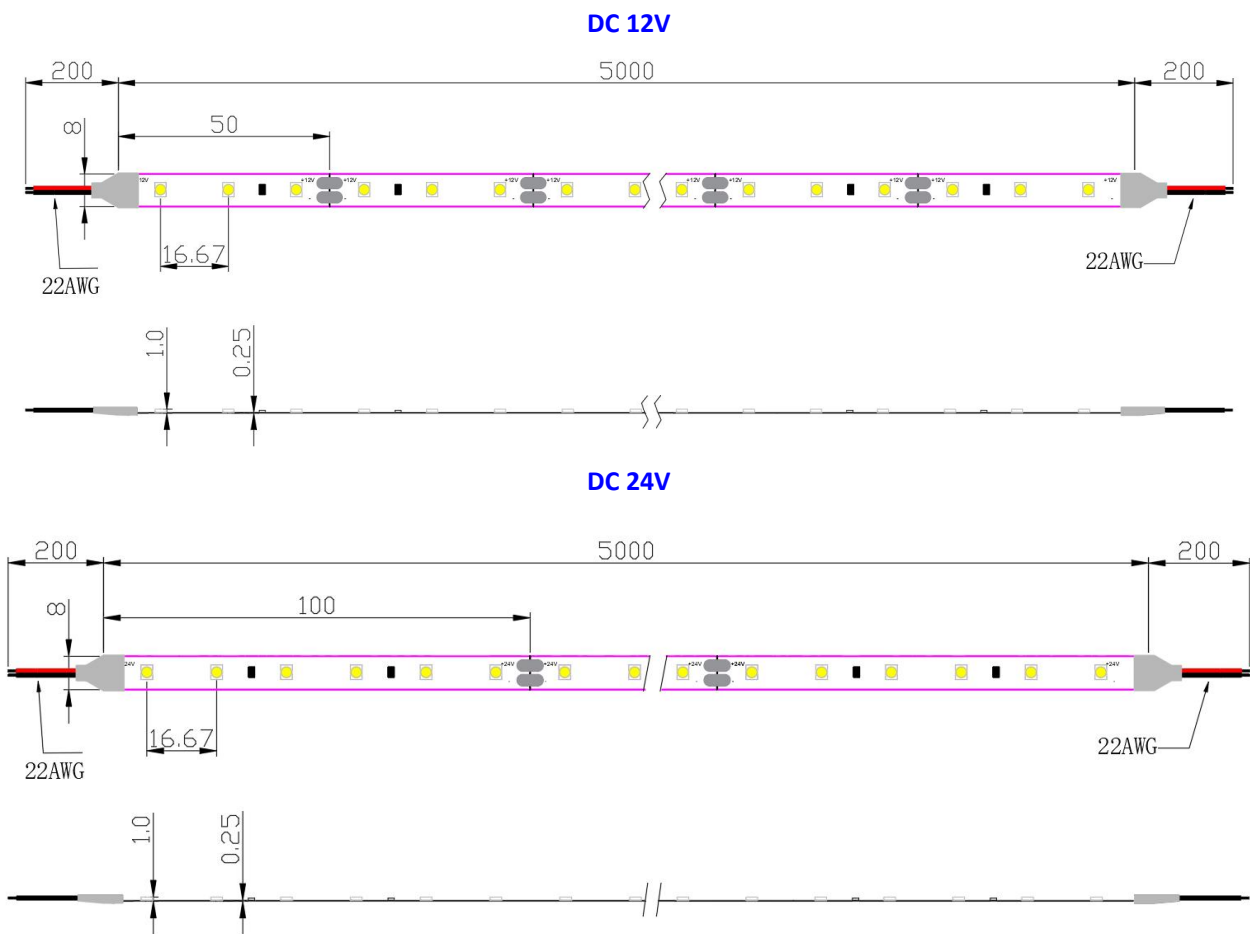


5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm

Electric principle:

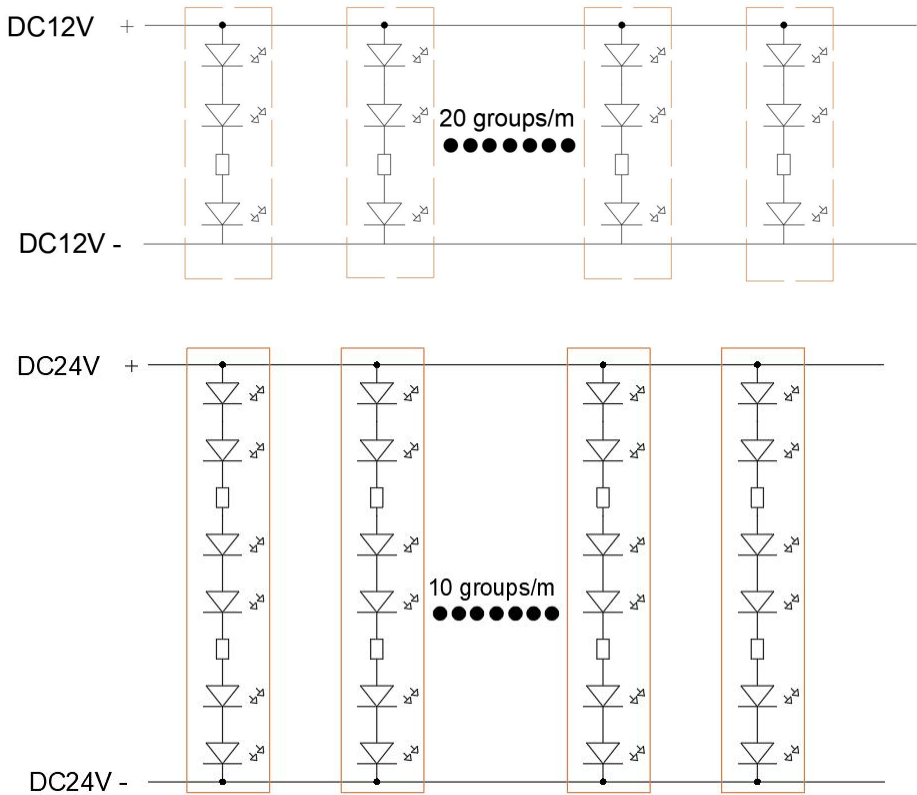

Optical/Lux graph:

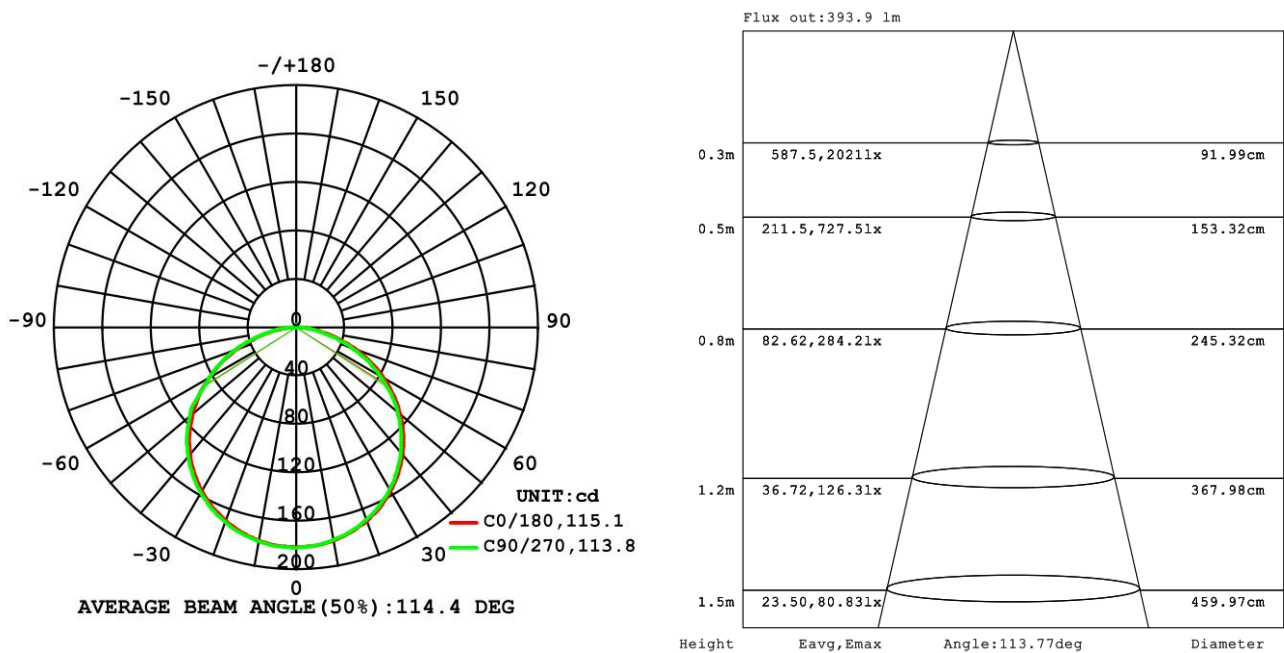


5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm


Package details :

Model	carton	Meter/Roll (m)	Roll/Carton (pcs)	Total Qty (m)	G.W (Kg)	Dimension (mm)
SR60-12/48-8/50-R2R	Inner Carton	5	60	300	4.35	L360*W330*H200
	Outer Carton	5	120	600	9.6	L680*W375*H225
	Inner box	50	1	50	4.35	L265*W55*H265
	Outer Carton	50	10	500	11.7	L545*W300*H285

Package :

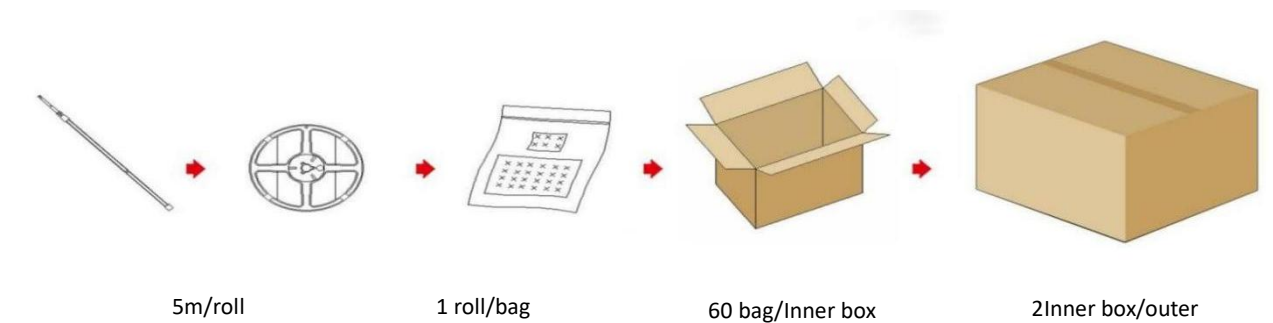

Schematic :

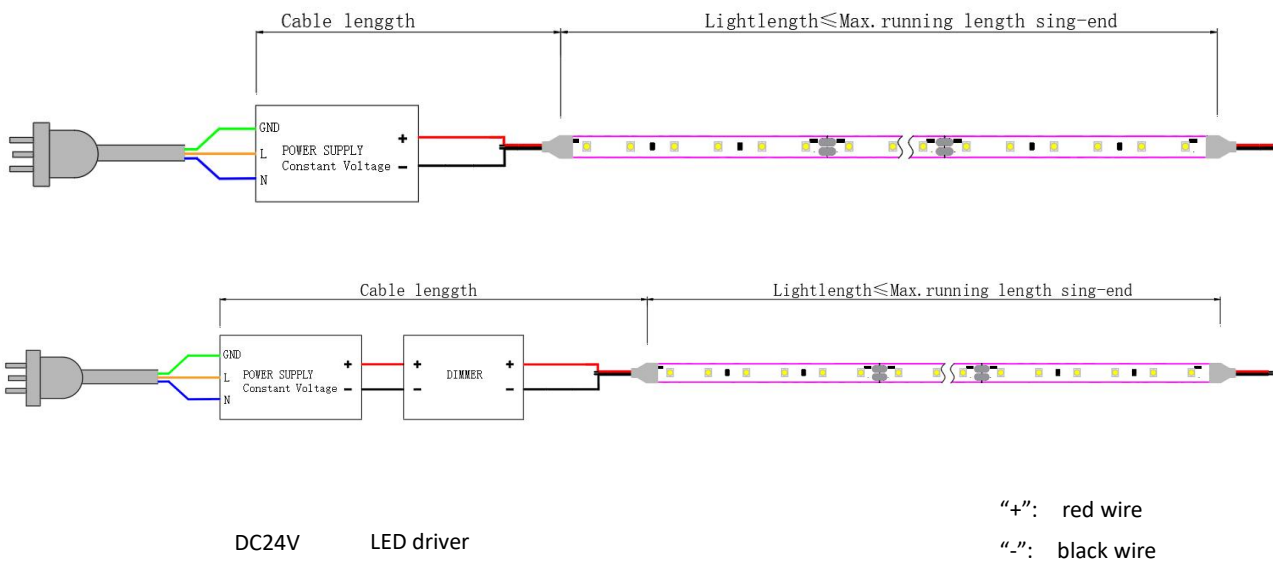


(PS: Strip positive connect to the driver positive,
Strip negative connect to driver negative)


5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm

Product and needed tools :




Product
Led strip




Needed tools
scissor


Installation steps:

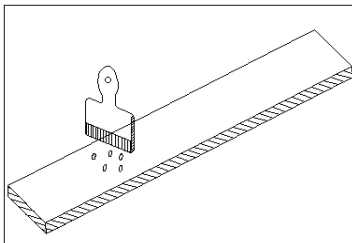


- Clean the installation surface




- Measure the length you need to install, cut at the nearest scissor mark line.
- For the left led strip, weld at the next scissor mark to connect with other connection wire.




- Do not pull the whole led strip from the back release paper by one time. No press on the leds.

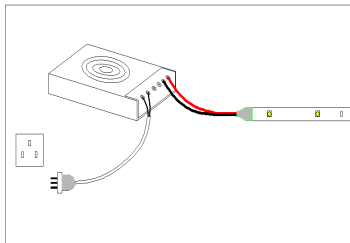


- Connect the led strip wire to the driver output side (Positive to positive, negative to negative.)
- Connect the driver input side to power-supply.

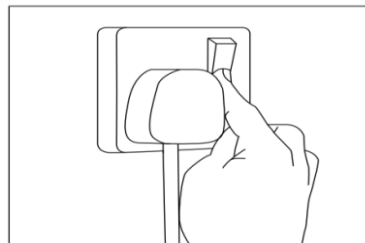


- Switch on and enjoy.



- No bending at the point of leds

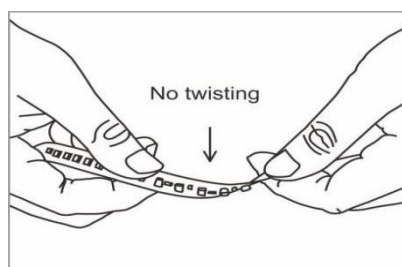

- No contortion of the led strip.

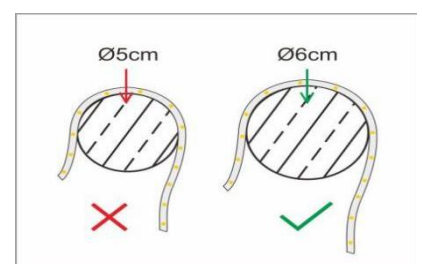

- No bending with Diameter<6cm

5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm

Usual problem with solutions:

Problem	Possible reasons	solution
All fail	<ul style="list-style-type: none">● No power supply.	Give power supply.
	<ul style="list-style-type: none">● Automatic switch-off because of the open circuit and short circuit.	Solve the problem, switch on again.
	<ul style="list-style-type: none">● Wrong connection (positive connect with negative).	Check and get right connection.
Part fail	<ul style="list-style-type: none">● Part power-supply fail.	Check and make sure the power supply well.
	<ul style="list-style-type: none">● Part circuit error.	
	<ul style="list-style-type: none">● Part wrong connection(positive connect negative).	Check and get right connection.
Inconsistent brightness or insuffiscent brightness	<ul style="list-style-type: none">● overload of the driver.	Use higher-power driver.
	<ul style="list-style-type: none">● Too big power consumption of the switch, or unbalanced power consumption from different strip series.	Keep the strip working voltage is more or less 5% than the Rated voltage. 1.shorten the connection cable length, or change to thicker cable. 2.Make sure the strip quantity is less than the allowed connection quantity.Keep the led strip quantity of each series similar) 。
	<ul style="list-style-type: none">● Too many Led strips connection.	Adjust the led strip quantity, make sure sufficient power supply.
LED flash	<ul style="list-style-type: none">● Poor welding connection of wires.	Check,find and solve it.
	<ul style="list-style-type: none">● switch problem.	Change to right switch.

5M/2835 constant voltage Led strips/

60pcs led/meter/DC 12/24V/IP20/8mm

Statements :

- For safety, the product wire should be moved and replaced by the manufacturer, agent or other authorized person.
- Please refer to the product manual before installation.
- Above-refered data is from our standard product. Please subject to your actual product data if there is difference.
- Above-refered schematic diagrams are from our standard product. Please subject to your actual product data if there is difference.
- In actual use,we suggest 80% consumption of the driver. Keep 20% as power to start the led strip.
- For safety, no touch the AC terminal.
- Any acidic or alkaline substance is forbidden.
- No notice for updated of this product.